



© All rights in and to this material are the sole property of ASSA ABLOY Entrance Systems AB. Copying, scanning, alterations or modifications are expressly forbidden without the prior written consent of the applicable company within ASSA ABLOY Entrance Systems AB. Rights reserved for changes without prior notice.

Activation units

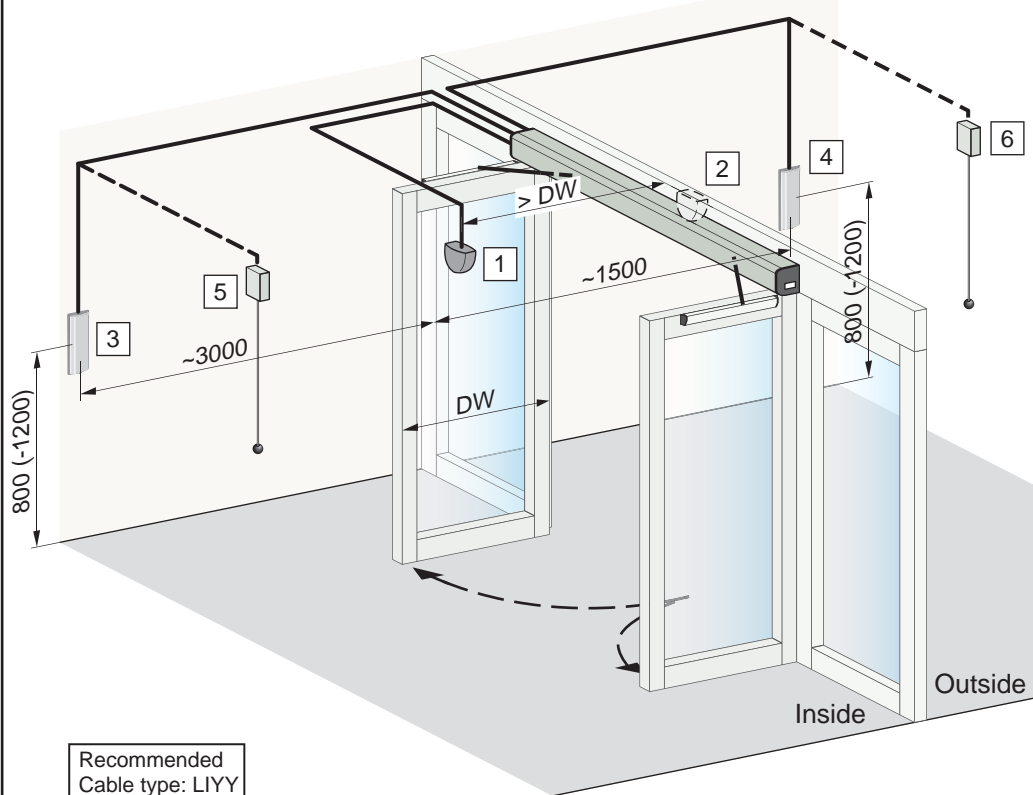

Mains, presence and security

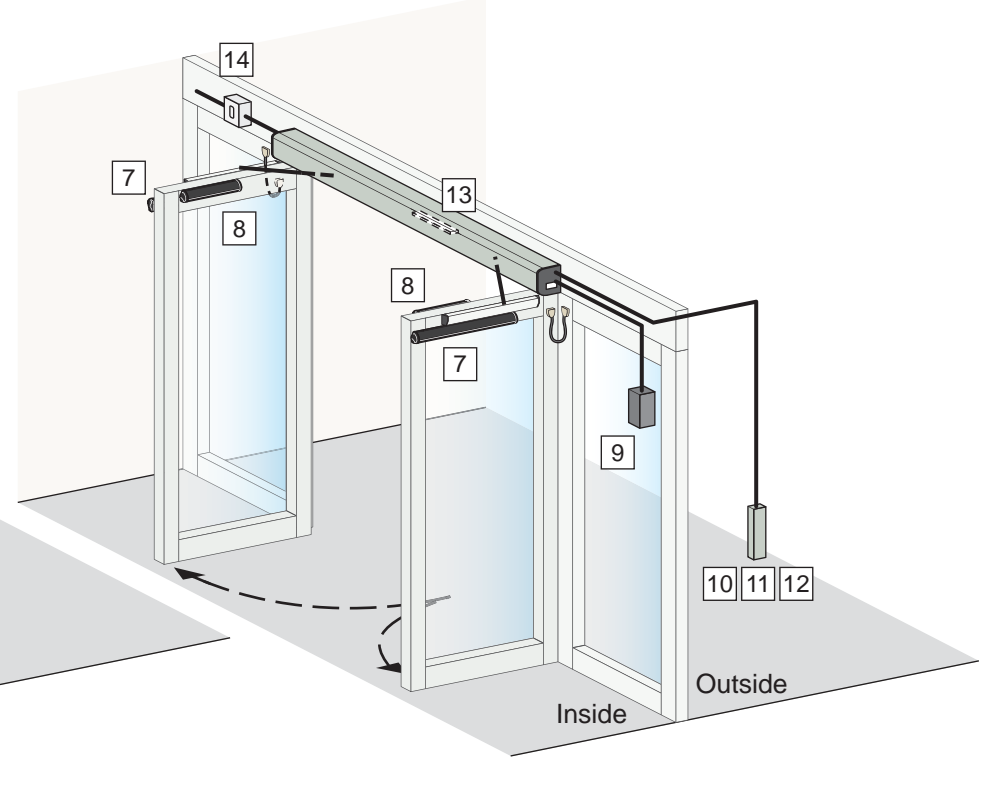

Recommended Cable type: LIYY

<input type="checkbox"/>	1		4 x 0,25 mm ²
<input type="checkbox"/>	2	Radar	
<input type="checkbox"/>	3		2 x 0,25 mm ²
<input type="checkbox"/>	4	Elbow switch	

<input type="checkbox"/>	5		2 x 0,25 mm ²
<input type="checkbox"/>	6	Pull cord switch	
<input type="checkbox"/>	7		4 x 0,25 mm ²
<input type="checkbox"/>	8	Presence sensor	

<input type="checkbox"/>	9		4 x 0,25 mm ²
<input type="checkbox"/>		Programme selector	
<input type="checkbox"/>	10		7 x 0,25 mm ² 3 m cable included
<input type="checkbox"/>		Keypad	

<input type="checkbox"/>	11		2 x 0,25 mm ²
<input type="checkbox"/>		Key switch	
<input type="checkbox"/>	12		4 x 0,25 mm ²
<input type="checkbox"/>		Card reader (locally)	

<input type="checkbox"/>	13		2 x 0,25 mm ²
<input type="checkbox"/>		Electrical strike	
<input type="checkbox"/>	14		3 x 1,5 mm ²
<input type="checkbox"/>		Mains switch (locally)	

Customer: _____

Door id: _____

Project No: _____

Besam ref: _____

Date: _____

Sign: _____

Cable plan
 Double swing doors
 PULL application

ASSA ABLOY

2.0 1003373