



Activation units

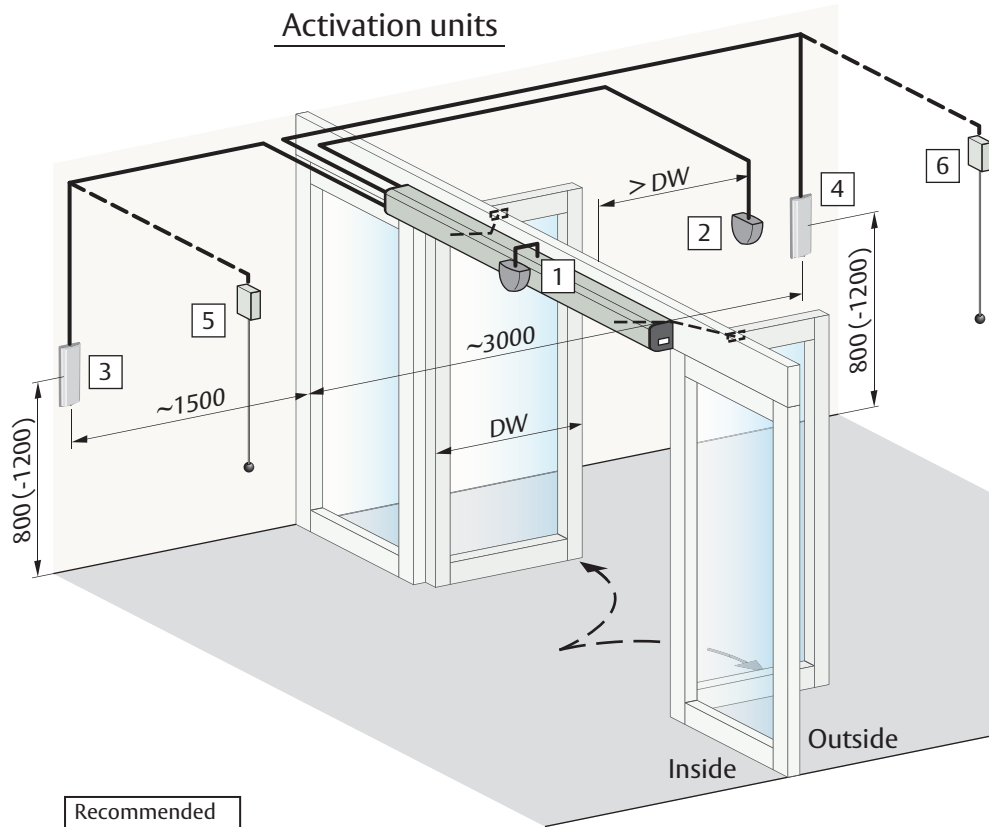

Mains, presence and security

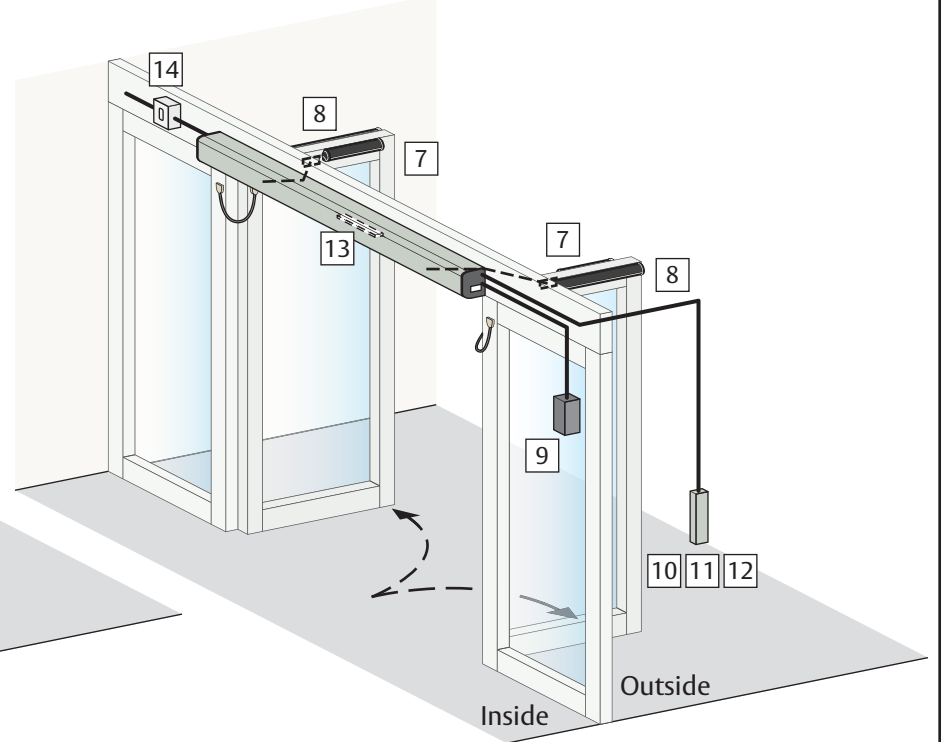

Recommended
Cable type: LIYY

<input type="checkbox"/>	1		4 x 0,25 mm ²
<input type="checkbox"/>	2	Radar	
<input type="checkbox"/>	3		2 x 0,25 mm ²
<input type="checkbox"/>	4	Elbow switch	

<input type="checkbox"/>	5		2 x 0,25 mm ²
<input type="checkbox"/>	6	Pull cord switch	
<input type="checkbox"/>	7		4 x 0,25 mm ²
<input type="checkbox"/>	8	Presence sensor	

<input type="checkbox"/>	9		4 x 0,25 mm ²
		Programme selector	
<input type="checkbox"/>	10		7 x 0,25 mm ² 3 m cable included
		Keypad	

<input type="checkbox"/>	11		2 x 0,25 mm ²
		Key switch	
<input type="checkbox"/>	12		4 x 0,25 mm ²
		Card reader (locally)	

<input type="checkbox"/>	13		2 x 0,25 mm ²
		Electrical strike	
<input type="checkbox"/>	14		3 x 1,5 mm ²
		Mains switch (locally)	

Customer: _____

Door id: _____

Project No: _____

Besam ref: _____

Date: _____

Sign: _____

Cable plan
Double swing doors
PUSH application

ASSA ABLOY

2.0 1003372